


Water Level Control System For Steam Boilers

Chamber mounted

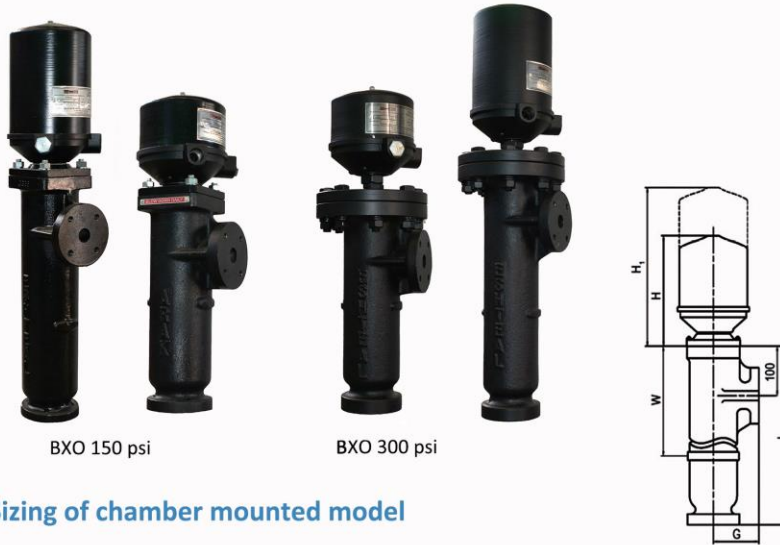

Sizing of chamber mounted model

Type number	Operating range	No of Switches max	Flanged screwed connection	Dimensions (mm)							
				C	G	H	H1	L	W	F	
CAST IRON CHAMBER –WORKING PRESSURE: 13KG/CM²											
BX02/1	62	1	-	BS4504.25-16/11	-	102	193	303	366	182	160
BX05/2	150	2	4	BS4504.25-16/11	-	102	293	497	468	277	160
BX07/2	250	2	5	BS4504.25-16/11	-	102	394	602	557	370	160
FABRICATED STEEL CHAMBER –WORKING PRESSURE :21KG/CM²											
BX09/1	62	1	-	BS4504.25-40/2	-	87	193	303	366	182	160
BX10/2	150	2	4	BS4504.25-40/2	-	87	293	497	468	277	160
BX11/2	250	2	6	BS4504.25-40/2	-	87	393	602	557	370	160
FABRICATED STEEL CHAMBER –WORKING PRESSURE:32KG/CM²											
BX12/1	62	1	-	BS 450.25-40/2	-	102	193	303	559	372	160
BX13/2	150	2	4	BS 450.25-40/2	-	100	293	497	559	372	160
BX14/2	250	2	6	BS 450.25-40/2	-	100	393	602	559	370	160

Water Level Control System For Steam Boilers

Electrical Characteristics

Single pole and double -throw operation for:

AC:


Maximum voltage 250 V
 Maximum current 5A
 Maximum power factor 0.4
 Maximum power 2000 VA

DC:


Resistive
 Maximum power 100W
 Maximum voltage 250V
 Maximum current 5A

Inductive

Maximum voltage 250 V
 Maximum current 0.5A
 Maximum time constant 40ms
 Maximum power 100W



Arrangements of vertical controllers on various types of boiler

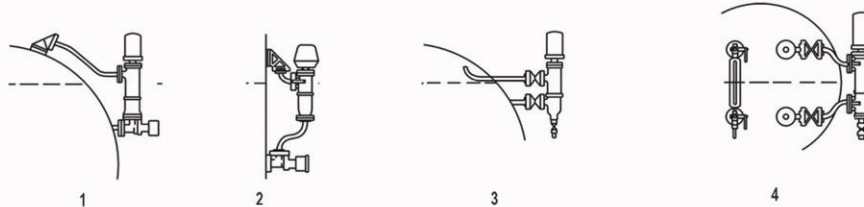

1
 side and bottom
 entry chamber with
 sequencing valve on
 horizontal boiler

2
 side and bottom
 entry chamber
 with sequencing
 valve on vertical
 boiler


3
 side and side entry
 chamber on horizontal
 boiler

4
 side and side entry
 chamber on steam
 drum of water tube
 boiler

Water Level Control System For Steam Boilers

Material of chamber mounted model

Num.	Part name	Material	
		Cast iron GG25	Cast steel A216-WCB
1	Chamber	Cast iron GG25	Cast steel A216-WCB
2	Stop cap	Stainless Steel	
3	Magnet	-	
4	Center tube	Stainless Steel	
5	Switch head	Aluminum	
6	Switch units	Cast ceramic	
7	Float road	Stainless Steel	
8	float	Stainless Steel	

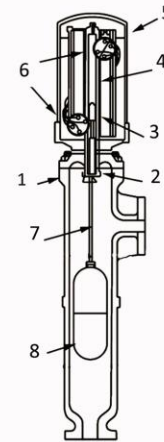

How to order water level control

Working pressure and temperature (bar g , C)

Connection type


Mounting type

Water Level Control System For Steam Boilers

Direct mounted

Direct mounted vertical controllers employ the same principles of operation and piece parts as the chamber mounted equivalents except that the chamber is exchanged for a large round flange and the tube assembly for mounting the controller directly on to the boiler shell connection. a stilling or guide tube should be provided, which may be fixed or removable, to ensure that the float rod is not damaged and the correct vertical movement is achieved.

Sizing Of Direct Mounted Model

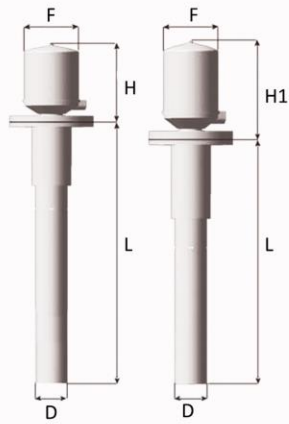

BDO 150psi

Model		L	F	H	H1	D
Class	Switches					
LC.D.A3.40	1			193	303	80
	2			293	307	80

Water Level Control System For Steam Boilers

